



T34-C

SOFT SERVE FREEZER

Two Flavor, Countertop, Dual Controls
A: Pump Feed Model **with**
pasteurization



Most **Compact & Versatile**
two-flavor countertop model with
independent intelligent controls
for ice cream and frozen yogurt

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Operation Logging

Logs every operation and error to provide history and data for easy troubleshooting

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Hopper Agitators

Maintain product consistency and prevent product separation

Ideal for any restaurants, convenience stores, dessert stands and delis to serve ice cream and gelato. Small foot print and low energy consumption help reduce operating cost.

Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control


Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



T34-C

SOFT SERVE FREEZER

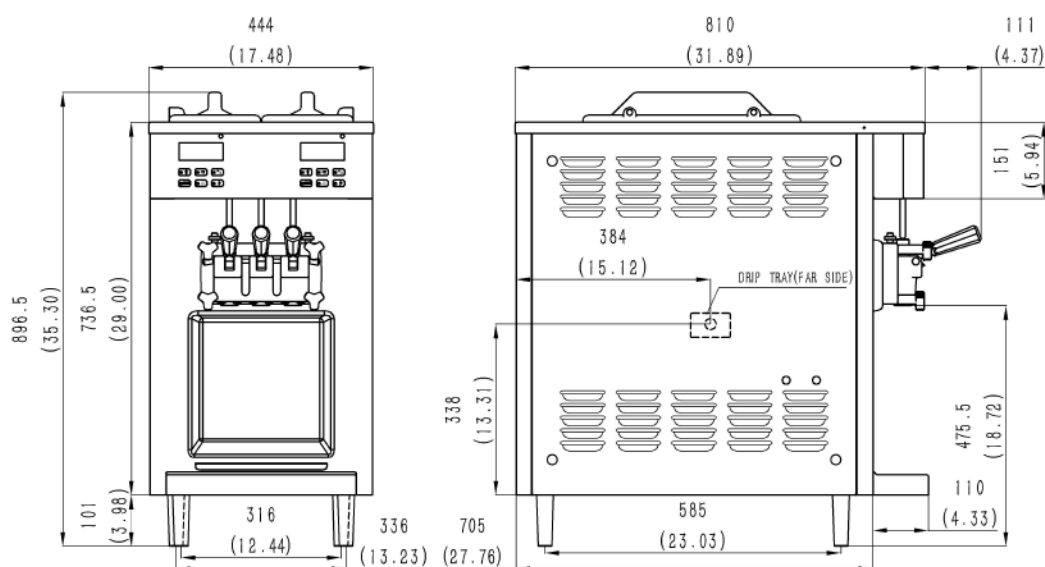

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.2L / 1.3qt
Mix Hoppers	2 x 8.0L (5L for A)
Output Capacity (80 grams)	280 serves/hr
Clearance Requirements	None

Weight

Net 126 / 280 135 / 300

Shipping 141 / 313 150 / 330

Volume 0.48 CBM / 16.95 CBF

Dimensions

Width 444 / 17.5 530 / 20.9

Depth 705 / 27.8 830 / 32.7

Height 897 / 35.3 1080 / 42.5

Electrical

220-240/50/1 15 11 1.9

208-230/60/1 15 11 2.0

FEATURES

Control Systems Double, Digital

Refrigerated Hoppers

Hopper Agitators

Temperature Display

Standby Mode

Auto Closing Dispensing Valves

Dispensing Speed Control

Low Mix Indicator Light & Alarm

Low Temperature Protection

Motor Overload Protection

High Pressure Protection

Defrost & Quick Freeze

Soft Start

Direct Drive Pump (A only)

AVAILABLE OPTIONS

Water Cooled

Cart (Trolley)

• Above specifications are subject to change without notice